


**PNÖMATİK ON-OFF VANA / PİRİNÇ GÖVDELİ
PASLANMAZ ÇELİK AKTÜATÖRLÜ
DİŞLİ / DÜZ GEÇİŞLİ (Y TİPİ)**

SERİ : 405



DN		PISTON	Δp bar	A	L	H	G	SW	Kv m ³ /h	AĞIRLIK (KG)
15	1/2"	Ø 50	20	65	160	165	G 1/8"	27	4,9	1,35
		Ø 63	35		170	175				1,55
20	3/4"	Ø 50	12	75	165	165		32	7,6	1,50
		Ø 63	16		175	175				1,70
25	1"	Ø 50	7	90	170	170		39	13,7	1,65
		Ø 63	14		180	185				1,90
		Ø 80	19		195	190				2,70
32	1 1/4"	Ø 63	9	110	200	195		50	20,7	2,50
		Ø 80	14		215	205				2,70
		Ø 100	27		235	225				3,30
40	1 1/2"	Ø 63	6	120	205	200		55	34,2	3,00
		Ø 80	10		220	210				3,60
		Ø 100	18		240	230	4,35			
50	2"	Ø 80	6	150	230	220	68	48,6	4,70	
		Ø 100	10		250	240			6,15	
65	2 1/2"	Ø 100	5	190	305	260	85	84,0	8,70	
		Ø 125	9,5		330	290			G 1/4"	11,50

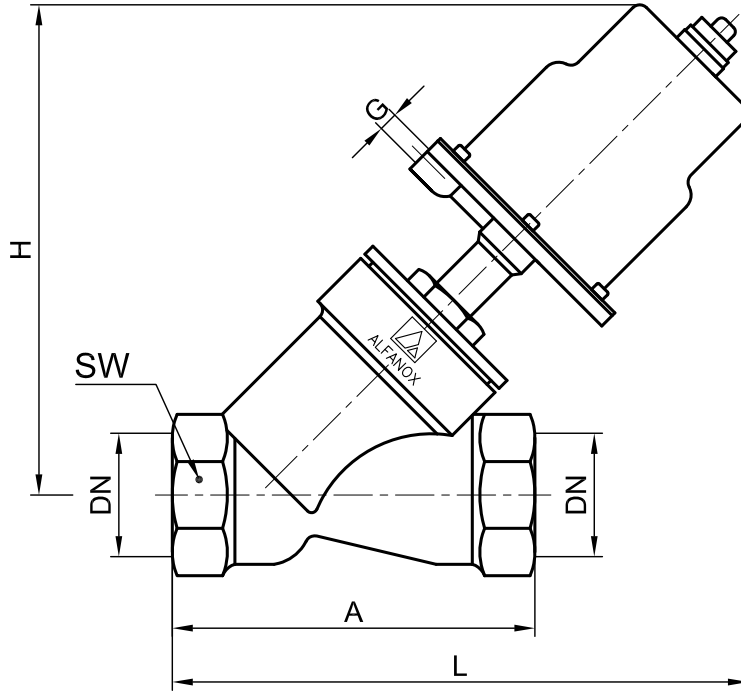

ALFANOX