


PNÖMATİK GLOB VANA

PASLANMAZ ÇELİK ON-OFF AKTUATÖRLÜ PİK DÖKÜM GÖVDELİ / PN 16 FLANŞLI

SERİ : 702

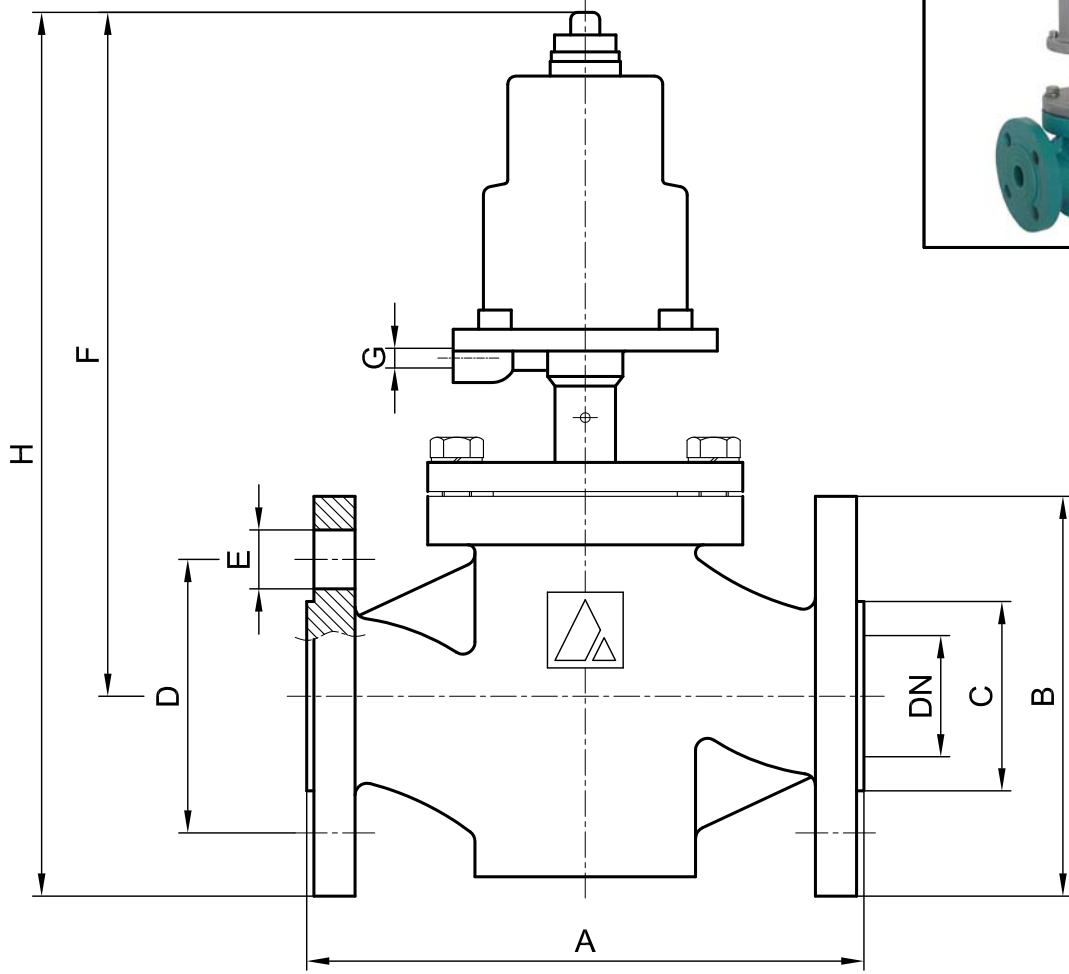

DN	PISTON	Δp bar	A	B	C	D	E	Delik sayısı	F	H	G	Kv m ³ /h	
15	1/2"	Ø 50	21	130	Ø 95	Ø 45	Ø 65	Ø 14	4	217.5	265	G 1/8"	3.9
20	3/4"	Ø 50	12	150	Ø 105	Ø 60	Ø 75	Ø 14	4	222.5	275	G 1/8"	6.8
25	1"	Ø 50	7	160	Ø 115	Ø 70	Ø 85	Ø 14	4	247.5	305	G 1/8"	11.5
		Ø 63	12					Ø 14	4	262.5	320	G 1/8"	
		Ø 80	27					Ø 14	4	277.5	335	G 1/8"	
32	1 1/4"	Ø 80	12	180	Ø 140	Ø 80	Ø 100	Ø 18	4	270	340	G 1/8"	16.9
40	1 1/2"	Ø 80	8	200	Ø 150	Ø 90	Ø 110	Ø 18	4	275	350	G 1/8"	24.5
50	2"	Ø 80	5	230	Ø 165	Ø 100	Ø 125	Ø 18	4	287.5	370	G 1/8"	42.3
		Ø 100	10					Ø 18	4	307.5	390	G 1/8"	
65	2 1/2"	Ø 100	4	290	Ø 185	Ø 120	Ø 145	Ø 18	4	322.5	415	G 1/4"	69.7
		Ø 125	7					Ø 18	4	362.5	455	G 1/4"	
80	3"	Ø 125	5	310	Ø 200	Ø 140	Ø 160	Ø 18	8	385	485	G 1/4"	89.4
		Ø 150	8					Ø 18	8	410	510	G 1/4"	
100	4"	Ø 125	1.5	350	Ø 220	Ø 160	Ø 190	Ø 18	8	415	525	G 1/4"	148.6
100	4"	Ø 150	4	350	Ø 220	Ø 160	Ø 190	Ø 18	8	440	550	G 1/4"	148.6



ALFANOX