
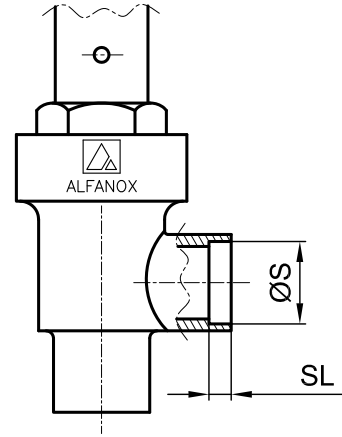


PASLANMAZ ÇELİK PNÖMATİK ON-OFF VANA
DİŞLİ & KAYNAK SOKETLİ
DİK GEÇİŞLİ (90°)

SERİ : 402

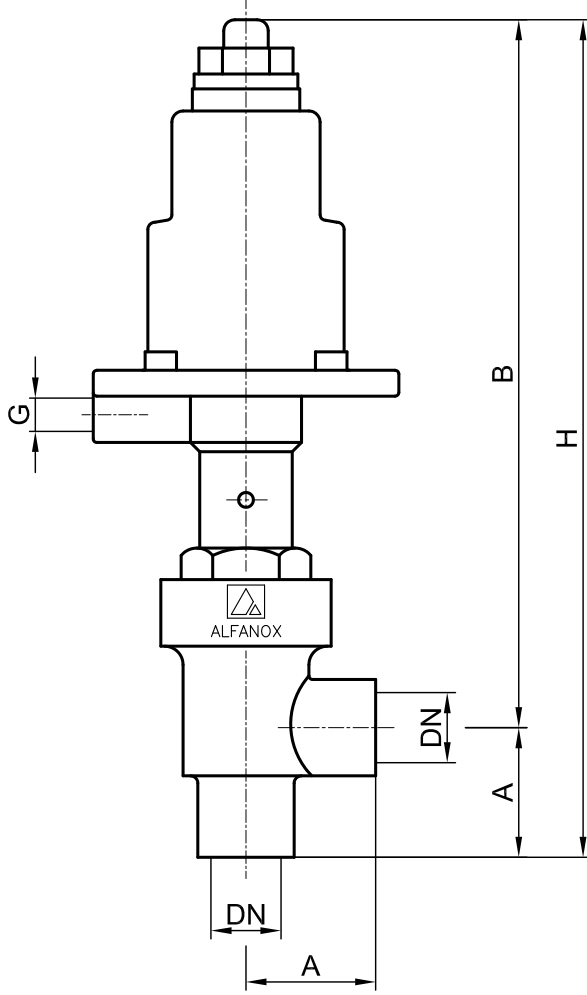

KAYNAK SOKETLİ

| DN | | PISTON | Δp bar | A | B | H | G | ØS | SL | Kv m ³ /h | AĞIRLIK (KG) |
|----|--------|--------|-------------------|----|-----|-----|--------|------|------|-------------------------|-----------------|
| 15 | 1/2" | Ø 50 | 21 | 35 | 195 | 230 | G 1/8" | 21,5 | 6 | 4,9 | 1,35 |
| | | Ø 63 | 33 | | 210 | 245 | | | | | 1,55 |
| 20 | 3/4" | Ø 50 | 12 | 40 | 195 | 235 | | 26,9 | | 7,6 | 1,50 |
| | | Ø 63 | 27 | | 210 | 250 | | | | | 1,70 |
| 25 | 1" | Ø 50 | 7 | 45 | 195 | 240 | | 33,9 | | 13,7 | 1,65 |
| | | Ø 63 | 12 | | 210 | 255 | | | | | 1,90 |
| | | Ø 80 | 27 | | 225 | 270 | | | | | 2,70 |
| 32 | 1 1/4" | Ø 63 | 7 | 55 | 215 | 270 | | 42,7 | | 20,7 | 2,50 |
| | | Ø 80 | 12 | | 235 | 290 | 2,70 | | | | |
| | | Ø 100 | 26 | | 255 | 310 | 3,30 | | | | |
| 40 | 1 1/2" | Ø 63 | 5 | 60 | 220 | 280 | 48,6 | 34,2 | 3,00 | | |
| | | Ø 80 | 8 | | 240 | 300 | | | 3,60 | | |
| | | Ø 100 | 16 | | 260 | 320 | | | 4,35 | | |
| 50 | 2" | Ø 80 | 5 | 70 | 245 | 315 | 60,6 | 48,6 | 4,70 | | |
| | | Ø 100 | 10 | | 265 | 335 | | | 6,15 | | |



ALFANOX