


AISI 316 SS / THREADED
PNEUMATIC ON-OFF ANGLE SEAT VALVE
SEAT SEAL : PTFE


SERIES : 105



DN	G"	PISTON	Δp bar	A	L	H	G	Kv m ³ /h	WEIGHT (KG)
65	2 1/2"	Ø 100	4	300	297	263	Ø6	84	8,60
		Ø 125	7		326	294			11,55
80	3"	Ø 125	5	310	339	306	Ø6	126	13,00
		Ø 150	8		360	331			16,30
100	4"	Ø 125	1,5	350	377	336	Ø6	197	16,70
		Ø 150	4		400	361			19,95
125	5"	Ø 150	2,5	400	449	388	Ø6	308	24,00
150	6"	Ø 150	1,5	480	486	418	Ø6	445	27,00

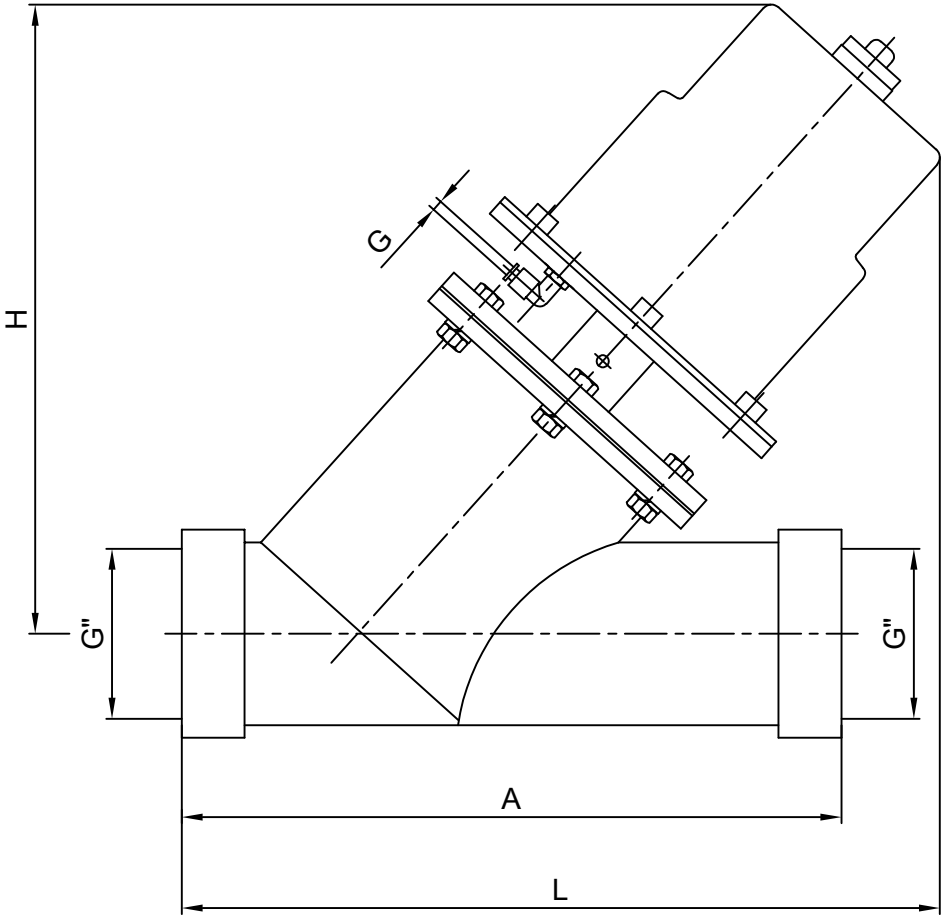

Ø100 ACTUATED - EPDM / PTFE / VITON

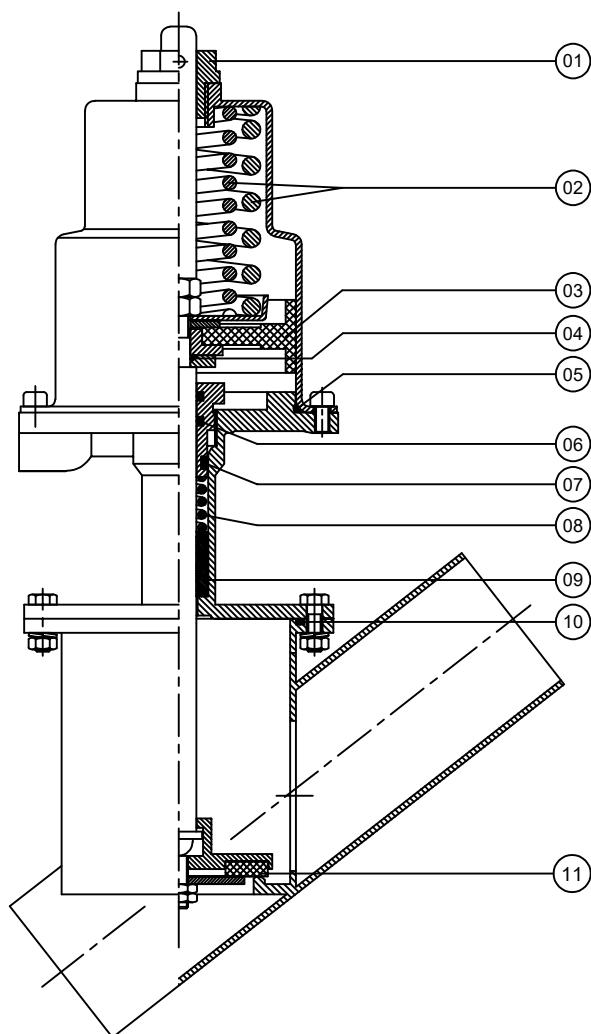


INSTRUCTIONS :

1. Valve can be fitted in any position.
2. Flow direction should be as indicated by an arrow on the body.
3. Working pressure for each size of valve should not be exceed the limits indicated in the chart.
4. Control pressure should not exceed the maximum and should not go lower then the minimum value.
5. CAUTION : Never fasten or remove the bolts & nuts prior to applying pressurized air.

For the spare part orders, notifying us about the part number at the chart below and also the serial number on the valve are adequate.

SPARE PART LIST		
PART NO	PART NAME	MATERIAL
01	UPPER SPINDLE GUIDE	NYLON 66
02	SPRING (DOUBLE)	STEEL
03	PISTON GROUP	NBR+BRASS
04	PISTON O-RING	NBR
05	CYLINDER O-RING	SILICONE
06	STUFFING BOX O-RING	SILICONE
07	STUFFING BOX GASKET	SILICONE
08	STUFFING BOX SPRING	INOX
09	STUFFING BOX V-CHEVRON	PTFE
10	BODY SEALING O-RING	NBR / SILICONE
11	SEAT SEAL	EPDM / PTFE / VITON



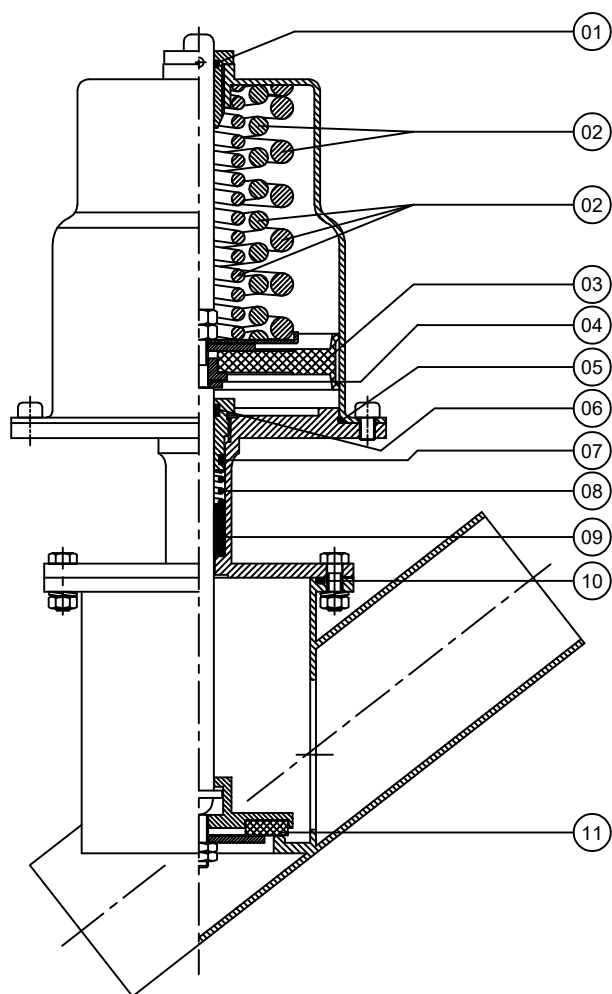

INSTRUCTIONS :

1. Valve can be fitted in any position.
2. Flow direction should be as indicated by an arrow on the body.
3. Working pressure for each size of valve should not be exceed the limits indicated in the chart.
4. Control pressure should not exceed the maximum and should not go lower then the minimum value.
5. **CAUTION :** Never fasten or remove the bolts & nuts prior to applying pressurized air.

For the spare part orders, notifying us about the part number at the chart below and also the serial number on the valve are adequate.

SPARE PART LIST		
PART NO	PART NAME	MATERIAL
01	UPPER SPINDLE O-RING	SILICONE
02	SPRING (DOUBLE)	STEEL
02	SPRING (TRIPLE)	STEEL
03	PISTON GROUP	NBR+BRASS
04	PISTON O-RING	NBR
05	CYLINDER O-RING	SILICONE
06	STUFFING BOX NUTRING	PU
07	STUFFING BOX GASKET	SILICONE
08	STUFFING BOX SPRING	INOX
09	STUFFING BOX V-CHEVRON	PTFE
10	BODY SEALING O-RING	SILICONE
11	SEAT SEAL	PTFE / VITON

