


**PNEUMATIC GLOBE VALVE
STAINLESS STEEL ON-OFF ACTUATED
GRAY CAST IRON BODY / PN 16 FLANGED**

SERIES : 702



DN	PISTON	Δp bar	A	B	C	D	E	Hole	F	H	G	Kv m ³ /h
15	1/2"	21	130	Ø 95	Ø 45	Ø 65	Ø 14	4	220	265	G 1/8"	3.9
20	3/4"	12	150	Ø 105	Ø 60	Ø 75	Ø 14	4	225	275	G 1/8"	6.8
25	1"	7	160	Ø 115	Ø 70	Ø 85	Ø 14	4	250	305	G 1/8"	11.5
		12					Ø 14	4	265	320	G 1/8"	
		16					Ø 14	4	280	335	G 1/8"	
32	1 1/4"	12	180	Ø 140	Ø 80	Ø 100	Ø 18	4	270	340	G 1/8"	16.9
40	1 1/2"	8	200	Ø 150	Ø 90	Ø 110	Ø 18	4	275	350	G 1/8"	24.5
50	2"	5	230	Ø 165	Ø 100	Ø 125	Ø 18	4	290	370	G 1/8"	42.3
		10					Ø 18	4	310	390	G 1/8"	
65	2 1/2"	4	290	Ø 185	Ø 120	Ø 145	Ø 18	4	325	415	G 1/4"	69.7
		7					Ø 18	4	365	455	G 1/4"	
		14					Ø 18	4	390	480	G 1/4"	
80	3"	5	310	Ø 200	Ø 140	Ø 160	Ø 18	8	385	485	G 1/4"	89.4
		8					Ø 18	8	410	510	G 1/4"	

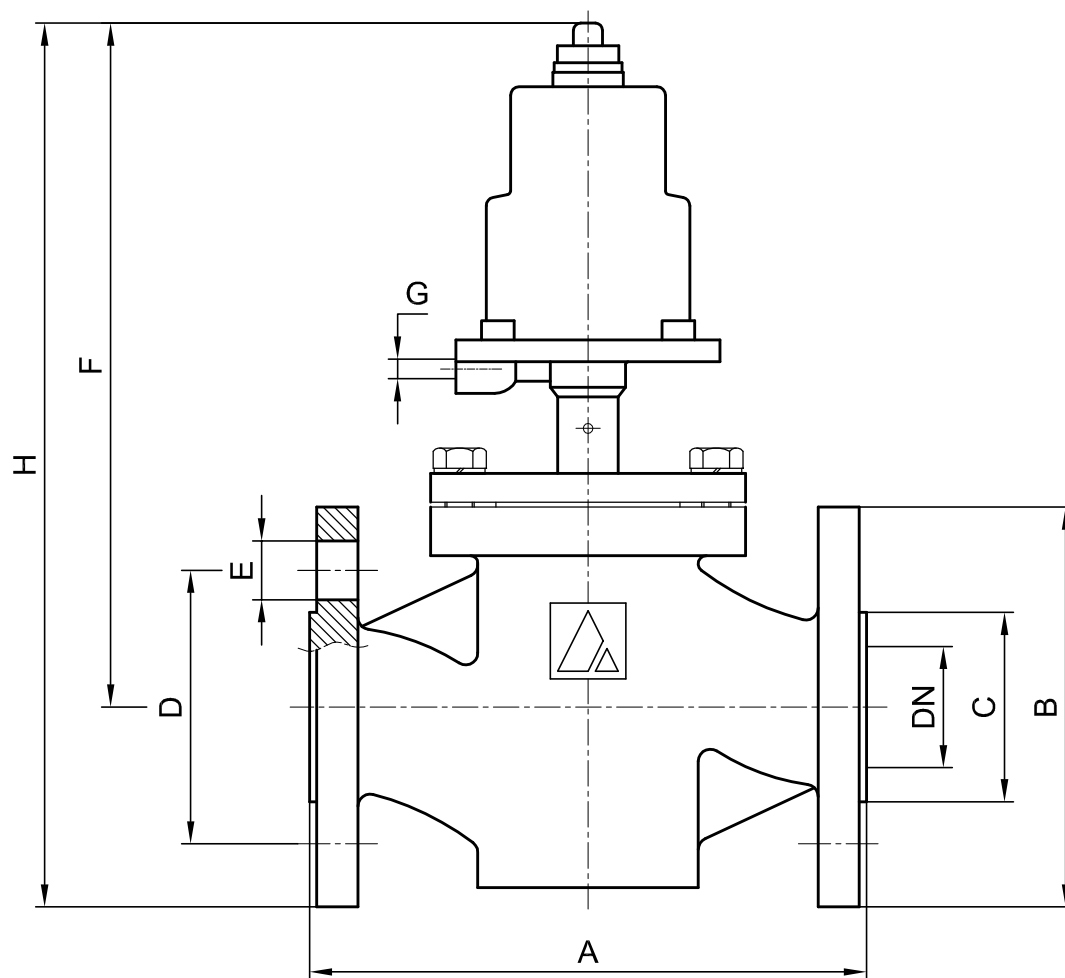

ALFANOX